

Functions

Online data sheet



Three versions are available:

- Backset 7.5 mm (1 to 3 locking points)
- Backset 15 mm (1 to 3 locking points)
- Backset 15 mm with lock (3 locking points)

All the rods are operated by traditional window handles or recess handles equipped with a 7 mm square pin.

These multi-locks have 2 operating positions:


- 1) 0° CLOSED SASH
- 2) 90° OPEN SASH

Depending on the series used, the rods have to be matched with specific coupling kits designed to adapt them to the various shapes of the profile.

The strength of the mushroom nib is greater than 150 kg.

The Champion Plus fastening rods with 2 and 3 locking points are compatible with the incorrect movement safety device art. 02770, which prevents the window handle from returning to the closed position with the sash open.

Zinc-plated steel lift-proof pin and rods
Box for rotor and nibs in zamak

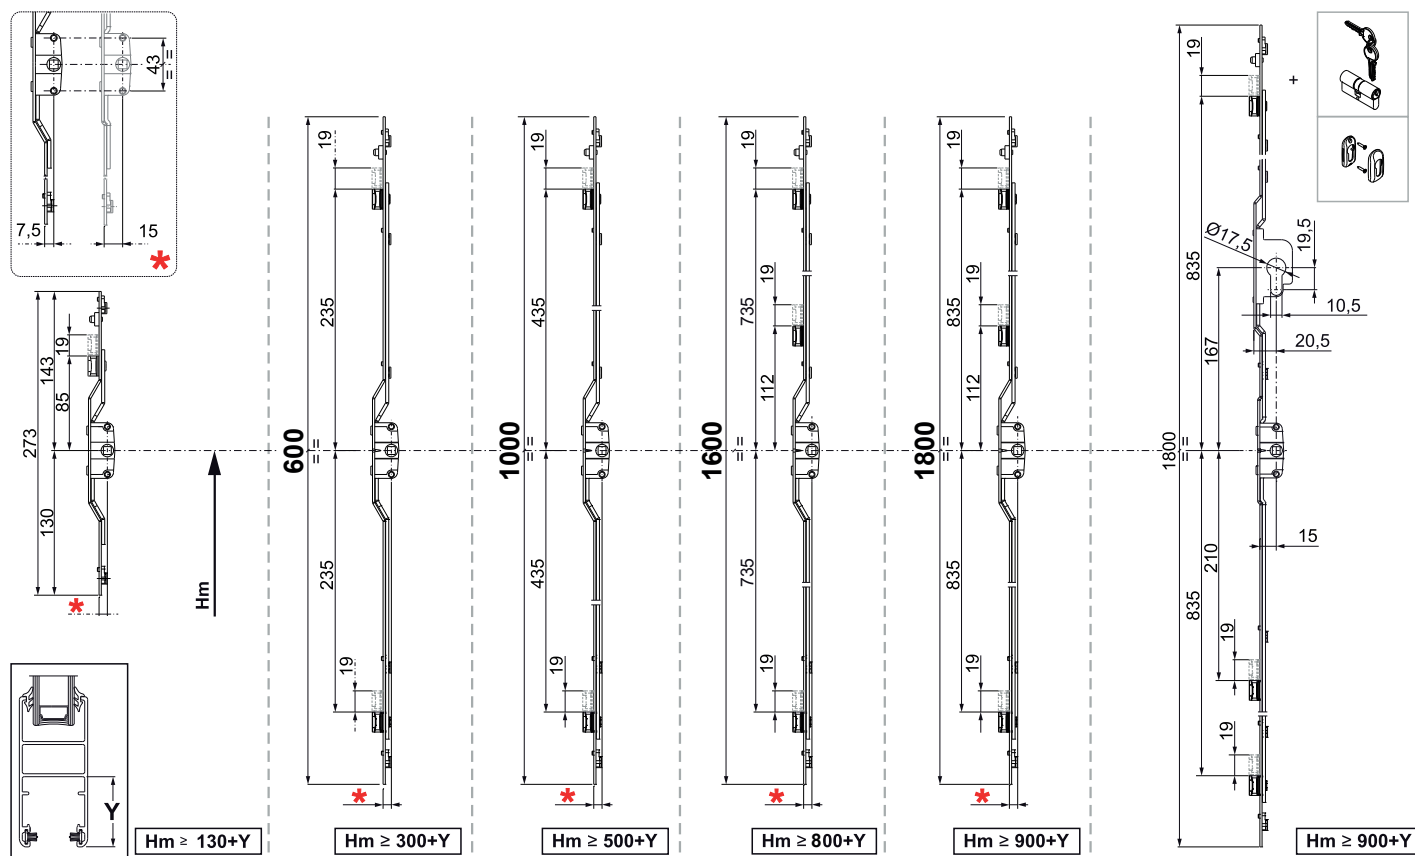

Item code	Description	Backset	Lock	Incorrect Movement Safety Device Compatibility	Length	Window handle height	Locking points	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
0272001	CHAMPION PLUS ROD	7,5	NO	NO	270	> 130 + Y	1	X				4
0272101	CHAMPION PLUS ROD	7,5	NO	YES	600	> 300 + Y	2	X				4
0272201	CHAMPION PLUS ROD	7,5	NO	YES	1000	> 500 + Y	2	X				4
0630901	CHAMPION PLUS ROD	7,5	NO	Yes	1600	> 800 + Y	3	X				4
0272301	CHAMPION PLUS ROD	7,5	NO	YES	1800	> 900 + Y	3	X				4
0272401	CHAMPION PLUS ROD	15	NO	NO	270	> 130 + Y	1	X				4
0272501	CHAMPION PLUS ROD	15	NO	YES	600	> 300 + Y	2	X				4
0272601	CHAMPION PLUS ROD	15	NO	YES	1000	> 500 + Y	2	X				4
0631001	CHAMPION PLUS ROD	15	NO	YES	1600	> 800 + Y	3	X				4
0272701	CHAMPION PLUS ROD	15	NO	YES	1800	> 900 + Y	3	X				4
0272801	CHAMPION PLUS ROD WITH LOCK	15	YES	YES	1800	> 900 + Y	3	X				4